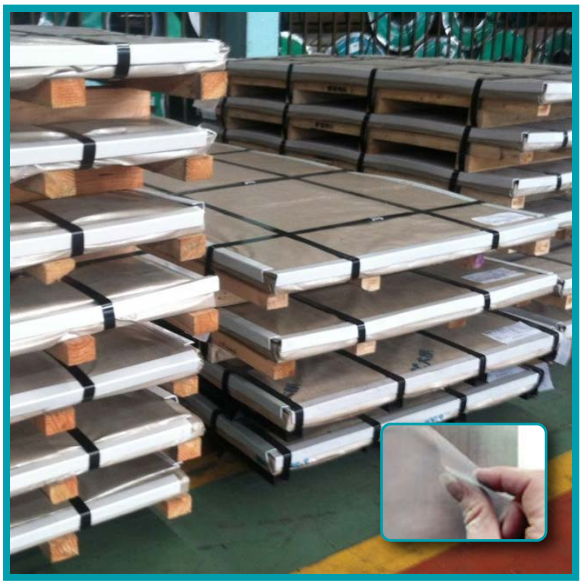

FICHA TÉCNICA

Láminas de acabado satinado No.4

Carbone Stainless Steel

DESCRIPCIÓN

Lámina de acabado satinado No.4 de calibre #22 de 4 x 8 píes. Cada lámina tiene una cubierta de PVC de alta resistencia que protege el acabado. Para su uso en proyectos arquitectónicos, construcción y varios.

CÓDIGO

LS 4X8 #22

Marca: Carbone Stainless Steel	**Tipo:** AISI 304
Espesor: 0.75 mm	**Norma de Fabricación:** ASTM A240/480
Calibre: #22	**Procedencia:** Importado
Medidas: 4′ x 8′ (pies) - 1219.2 x 2,438.0 (mm)	
Acabado: Satinado No.4	

EMPRESAS CARBONE S.A.						Certificate No. 180206C0022
Product	PRIME COLD ROLLED STAINLESS STEEL SHEET					
Specification	ASTM A240M-16a/A480M-16b					
Steel Grade	304	**Finish**	N0.4		Protect	PE

Item No.	Heat No.	Product Description			Chemical Composition(%)								Tension Test			*01	*02	C/No
		Dimensions	Quantity Pcs	Weight kgs	C	Si	Mn	P	S	Ni	Cr	N	0.2% Y.S.	T.S.	E.L.			
					X10^{-3}	X10^{-2}	X10^{-2}	X10^{-3}	X10^{-3}	X10^{-2}	X10^{-2}	X10^{-3}	MPa		%	HRB	°C/W.Q.	
	Specification			Min.						800	1750		205	515	40		1040	
				Max.	70	75	200	45	30	1050	1950	100				92		
1	C33AT1704186	2.5 mm x 1,219.0 mm x 3,048.0 mm	20	1,473	47	51	88	33	3	803	1826	60	279	633	55	82	1050	1
2	C33AT1704186	2.5 mm x 1,219.0 mm x 3,048.0 mm	20	1,473	47	51	88	33	3	803	1826	60	279	633	55	82	1050	2
3	C33AT1704269	2 mm x 1,219.0 mm x 3,048.0 mm	30	1,768	4.4	55	88	34	2	809	1805	62	299	654	55	83	1050	3
4	C33AW1800016	1.5 mm x 1,219.0 mm x 3,048.0 mm	54	2,387	19	38	152	32	2	810	1810	50	288	684	51	75	1050	4
5	C33AW1800016	1.5 mm x 1,219.0 mm x 3,048.0 mm	54	2,387	19	38	152	32	2	810	1810	50	288	684	51	75	1050	5
6	C33AW1800016	1.5 mm x 1,219.0 mm x 3,048.0 mm	53	2,342	19	38	152	32	2	810	1810	50	288	684	51	75	1050	6
7	C33AW1800016	1.5 mm x 1,219.0 mm x 3,048.0 mm	53	2,342	19	38	152	32	2	810	1810	50	288	684	51	75	1050	7
8	C33AW1800016	1.5 mm x 1,219.0 mm x 3,048.0 mm	53	2,342	19	38	152	32	2	810	1810	50	288	684	51	75	1050	8
9	C33AW1800016	1.5 mm x 1,219.0 mm x 3,048.0 mm	53	2,342	19	38	152	32	2	810	1810	50	288	684	51	75	1050	9
10	C33AT1800122	1.2 mm x 1,219.0 mm x 3,048.0 mm	65	2,298	50	46	88	35	3	806	1805	63	322	673	54	86	1050	10
11	C33AT1800122	1.2 mm x 1,219.0 mm x 3,048.0 mm	65	2,298	50	46	88	35	3	806	1805	63	322	673	54	86	1050	11
12	C33AT1800122	1.2 mm x 1,219.0 mm x 3,048.0 mm	65	2,298	50	46	88	35	3	806	1805	63	322	673	54	86	1050	12
13	C33AT1800122	1.2 mm x 1,219.0 mm x 3,048.0 mm	65	2,298	50	46	88	35	3	806	1805	63	322	673	54	86	1050	13
14	C33AT1800052	0.9 mm x 1,219.0 mm x 3,048.0 mm	84	2,227	60	49	90	32	2	808	1815	53	302	671	56	82	1050	14
15	C33AT1800052	0.9 mm x 1,219.0 mm x 3,048.0 mm	83	2,201	60	49	90	32	2	808	1815	53	302	671	56	82	1050	15
16	C33AT1800052	0.9 mm x 1,219.0 mm x 3,048.0 mm	83	2,201	60	49	90	32	2	808	1815	53	302	671	56	82	1050	16
17	C33AT1800124	0.8 mm x 1,219.0 mm x 3,048.0 mm	80	1,886	56	47	87	32	3	810	1815	61	309	664	55	81	1050	17
18	C33AT1800124	0.8 mm x 1,219.0 mm x 3,048.0 mm	80	1,886	56	47	87	32	3	810	1815	61	309	664	55	81	1050	18
19	C33AT1800065	0.75 mm x 1,219.0 mm x 2,438.0 mm	90	1,768	47	58	113	28	4	805	1808	48	285	672	60	86	1050	21
		TOTAL:	1,160	40,217														

Remark

Note

*01 = Hardness Test
*02= Heat Treatment
*Gauge Length: 50mm

1 MPa=1 N/mm^2=10bar=145psi=10.2kgf/cm^2

Visual Inspection(Surface) and Dimension Check : OK

Surveyor By		
N/A	We hereby certify that material described herein has been manufactured and tested with satisfactory results ip accordance with the requirement of the above material specification. The material described above has been found free of radiation by raw material supplier.	1.ISO 9001:2015 (No.01100056299) 2.PED/AD2000 (No.01202TWN/Q-050105) 3.ISO 14001:2004 (No.01104822096385) 4.OHSAS 18001:2007 (No.01113822096385)