


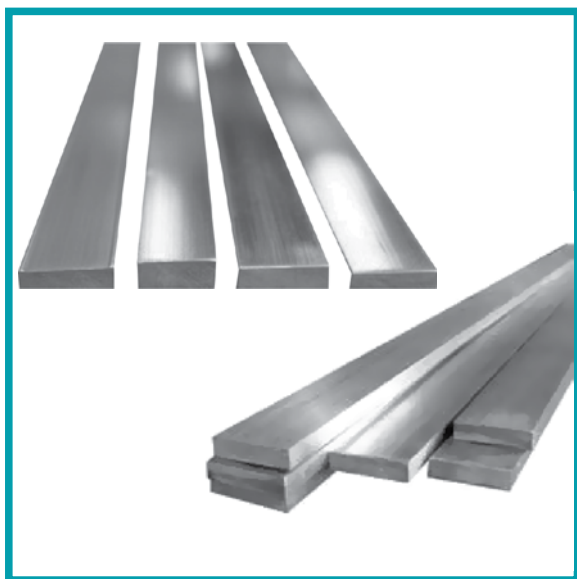

FICHA TÉCNICA

Producto: **Platina de acero inoxidable**

DESCRIPCIÓN: Platina de acero inoxidable ASTM A276 T-304 de acabado satinado de 4 m de largo de 10 mm - $\frac{3}{8}$ " de espesor y un ancho de 60 mm - 2 $\frac{1}{2}$ ".

CÓDIGO: PLATINA 60MM. X 10MM

Marca: Carbone Stainless Steel

Espesor: 10 mm - $\frac{3}{8}$ "

Ancho: 60 mm - 2 $\frac{1}{2}$ "

Largo: 6 m - 19' (pies)

Material: Acero Inoxidable T-304

Acabado: Satinado

Norma de Fabricación: ASTM A276

Procedencia: Importado

EMPRESAS CARBONE S.A.				Certificate No. 00520180000021407					
Product		Stainless Steel Flat Bars							
Specification		ASTM A276							
Standard		AISI 304 State		Finish	Satin finish			Protect	-----

Item No.	Product Description			Chemical Composition(%)							Mechanical Test				
	Dimensions	Quantity Pcs	Weight kgs	C	Si	Mn	P	S	Ni	Cr	Yield Strength	Tensile Strength	Elongation	HV	
											MPa		%		
Specification				Standard	≤0.08	≤1.00	≤2.00	≤0.035	≤0.030	8.00 - 10.00	17-19	≥205	≥520	≥35	≤200
1	20 mm x 3 mm x 6000 mm	300	--	0.0421	0.32	0.716	0.0213	0.01620	8.081	17.4500	365	640	48	150	
2	20 mm x 4 mm x 6000 mm	300	--	0.0421	0.32	0.716	0.0213	0.01620	8.081	17.4500	350	630	48	155	
3	20 mm x 6 mm x 6000 mm	80	--	0.0421	0.32	0.716	0.0213	0.01620	8.081	17.4500	360	650	46	153	
4	25 mm x 3 mm x 6000 mm	150	--	0.0421	0.32	0.716	0.0213	0.01620	8.081	17.4500	350	630	47	156	
5	25 mm x 4 mm x 6000 mm	200	--	0.0421	0.32	0.716	0.0213	0.01620	8.081	17.4500	370	640	46	155	
6	25 mm x 6 mm x 6000 mm	30	--	0.0421	0.32	0.716	0.0213	0.01620	8.081	17.4500	360	640	48	152	
7	30 mm x 3 mm x 6000 mm	100	--	0.0421	0.32	0.716	0.0213	0.01620	8.081	17.4500	365	630	47	154	
8	60 mm x 4 mm x 6000 mm	60	--	0.0421	0.32	0.716	0.0213	0.01620	8.081	17.4500	370	650	48	155	
9	50 mm x 4 mm x 6000 mm	80	--	0.0421	0.32	0.716	0.0213	0.01620	8.081	17.4500	350	640	46	154	
9	50 mm x 6 mm x 6000 mm	150	--	0.0435	0.33	0.723	0.0243	0.01722	8.026	17.6800	360	630	48	140	
10	60 mm x 6 mm x 6000 mm	50	--	0.0421	0.32	0.716	0.0213	0.01620	8.081	17.4500	360	650	47	155	
11	80 mm x 6 mm x 6000 mm	70	--	0.0421	0.32	0.716	0.0213	0.01620	8.081	17.4500	350	640	48	155	
12	60 mm x 10 mm x 6000 mm	50	--	0.0435	0.335	0.723	0.0243	0.01722	8.035	17.6800	360	650	50	140	
13	80 mm x 10 mm x 6000 mm	50	--	0.0421	0.32	0.716	0.0213	0.01620	8.081	17.4500	365	650	46	154	

Remark

Note

*01 = Hardness Test
 *02= Heat Treatment
 *Gauge Length: 50mm
 1 MPa=1 N/mm²=10bar=145psi=
 10.2kgf/cm²

Visual Inspection(Surface) and Dimension Check : OK

Surveyor By	We hereby certify that material described herein has been manufactured and tested with satisfactory results in accordance with the requirement of the above material specification. The material described above has been found free of radiation by raw material supplier.	1.ISO 9001:2015 (No.01100056299) 2.PED/AD2000 (No.01202TWN/Q-050105) 3.ISO 14001:2004 (No.01104822096385) 4.OHSAS 18001:2007 (No.01113822096385)	
N/A			